



PROCESS EQUIPMENT

Pumping Solutions for Process Industries

EUROPE, MIDDLE EAST & AFRICA



PROVEN QUALITY. LEADING TECHNOLOGY.

GRACO'S PUMP SOLUTIONS HAVE YOU COVERED

Experienced customers know the difference. Graco professional pumps are solid investments that perform reliably, year after year.

TRUST YOUR BUSINESS AND REPUTATION TO GRACO

Graco is committed to providing the highest quality products available, backed by high marks in customer satisfaction.

AMERICAN BUILT QUALITY SINCE 1926

100% factory-tested and field-proven Graco professional pumps are manufactured, assembled and supported in the USA.

INDUSTRY-LEADING SOLUTIONS

Graco offers a wide range of pump sizes and materials to deliver industry-leading solutions for nearly any fluid transfer application.



HUSKY® Air-Operated Double Diaphragm Pumps

- Flow rates up to 1136 lpm
- Rugged construction resists corrosion for reliable performance and long life in heavy duty transfer applications



QUANTM™ Electric Double Diaphragm Pumps

- Flow rates up to 454 lpm
- Experience the benefits of an AODD with increased efficiency and significantly quieter operation



CHEMSAFE™ Chemical Pumps

- Flow rates up to 378,5 lpm
- Ideal for pumping highly corrosive chemicals



SOLOTECH™ Peristaltic Hose Pumps

- Flow rates up to 67 lpm
- Single roller design provides more flow per revolution than conventional designs to deliver a long-lasting hose life



HYDRA-CLEAN® High Pressuring Cleaning

- Pressures up to 310 bar
- Ideal for hazardous locations and pumping dirty water



FAST-FLO® Piston Transfer Pumps

- Pressures up to 7 bar
- Available for either drum transfer or wall mount siphon feed applications. Ideal for lower viscosity fluids

THE HUSKY ADVANTAGE

Our Husky air-operated double diaphragm pumps are loaded with features to help you get the job done right, every time, and are built to save you money. Each pump is ruggedly constructed to deliver a long, trouble-free product life.



HEAVY-DUTY DESIGN

Rugged construction delivers reliable performance and long life

MATERIAL COMPATIBILITY

Wide range of materials available to handle virtually any fluid in need of transfer

RUNS DRY

Seal-less design eliminates leaking and failures due to run-dry pump conditions

LEAK DETECTOR OPTIONS

Reduce risk with a leak detector and know immediately when your product is leaking



FLOW RATES

Flow rates range up to 1135 lpm

LUBE-FREE MAINTENANCE

Fewer moving parts and complete external serviceability

STALLS UNDER PRESSURE

Prevents pump failures from clogged lines or closed valves

SELF-PRIMING

Strong suction capabilities significantly reduces chances of damaging your system

THE RIGHT OPTION FOR EVERY JOB

Choose from a wide selection of materials to handle numerous applications, including corrosive and abrasive fluid transfer. Easily customize your fluid sections and get the best pump for the job.

| PUMP SIZE | Max. Flow Rate | Max. Fluid Pressure | Connection Size | Max. Pumpable Solids |
|-----------|---------------------|-----------------------------|------------------------------|----------------------|
| 205 | 19 lpm (5 gpm) | 7 bar, 0.7 MPa (100 psi) | 1/4 in. | 1.5 mm (0.06 in.) |
| 307 | 24.6 lpm (6.5 gpm) | 7 bar, 0.7 MPa (100 psi) | 3/8 in. | 1.6 mm (1/16 in.) |
| 515 | 57 lpm (15 gpm) | 7 bar, 0.7 MPa (100 psi) | 1/2 in. | 2.5 mm (3/32 in.) |
| 716 | 61 lpm (16 gpm) | 7 bar, 0.7 MPa (100 psi) | 3/4 in. | 2.5 mm (3/32 in.) |
| 1050 | 189 lpm (50 gpm) | 8.6 bar, 0.86 MPa (125 psi) | 1 in. | 3.2 mm (1/8 in.) |
| 1590 | 378.5 lpm (100 gpm) | 8 bar, 0.8 MPa (120 psi) | 1.5 in. | 4.8 mm (3/15 in.) |
| 15120 | 454 lpm (120 gpm) | 8.6 bar, 0.86 MPa (125 psi) | 1.5 in. | 6.3 mm (1/4 in.) |
| 2150 | 568 lpm (150 gpm) | 8 bar, 0.8 MPa (120 psi) | 2 in. | 6.3 mm (1/4 in.) |
| 2150LP | 568 lpm (150 gpm) | 8 bar, 0.8 MPa (120 psi) | 2 in. | 46 mm (1.8 in.) |
| 2200 | 757 lpm (200 gpm) | 8.6 bar, 0.86 MPa (125 psi) | 2 in. (50mm) ANSI/DIN flange | 9.5 mm (3/8 in.) |
| 3250 | 946 lpm (250 gpm) | 8.6 bar, 0.86 MPa (125 psi) | 3 in. | 13 mm (1/2 in.) |
| 3300 | 1135 lpm (300 gpm) | 8.6 bar, 0.86 MPa (125 psi) | 3 in. | 13 mm (1/2 in.) |



*G.E.T. = Graco Engineered Thermoplastic

FIND THE RIGHT PUMP FOR YOUR APPLICATION



graco.com/pumphouse

QUANTM™ ELECTRIC DIAPHRAGM PUMPS

HIGHEST PRODUCTIVITY & ENERGY EFFICIENCY

Graco's QUANTM electric-operated double diaphragm (EODD) pumps combine the advantages of an AODD pump like self-priming, stalling under pressure, and increased diaphragm life with the efficiency of an electric drive.

ELECTRIC DRIVE

- Up to 80% more efficient than AODD pumps
- Eliminate the requirement for compressed air, relieving the load on air compressors
- IE5 energy efficiency classified

QUIET OPERATION

- Eliminating compressed air drives significant noise reduction
- 23% reduction in sound pressure over standard AODD pumps
- 90% decrease in sound intensity

INTEGRATED CONTROL

- Control the pump with the turn of a dial
- Features intelligent Auto-Prime mode for faster priming
- IP66 wash-down rated
- Leak detectors are standard to monitor for diaphragm rupture or other leaks

AUTOMATION

- Equipped with an I/O port for remote or PLC pump control to start or stop the pump and adjust speed or to add a level sensor

SMALL FOOTPRINT & ENVELOPE

- Similar in size to Graco's AODD pumps
- Removal of the gearbox reduces footprint compared to other electric options



| PUMP SIZE | Max. Flow Rate | Max. Fluid Pressure | Connection Size | Max. Pumpable Solids |
|---------------|-------------------|----------------------------|-----------------|----------------------|
| i30 | 114 lpm (30 gpm) | 7 bar, 0.7 MPa (100 psi) | 1 in. | 3.2 mm (0.125 in.) |
| i80 | 300 lpm (80 gpm) | 7 bar, 0.7 MPa (100 psi) | 1.5 in. | 4.8 mm (0.19 in.) |
| i120 | 454 lpm (120 gpm) | 4.1 bar, 0.41 MPa (60 psi) | 2 in. | 6.35 mm (0.25 in.) |
| i120LP | 454 lpm (120 gpm) | 4.1 bar, 0.41 MPa (60 psi) | 2 in. | 46 mm (1.8 in.) |

DIAPHRAGM PUMP ACCESSORIES

OPTIMIZE YOUR TRANSFER SYSTEM

Graco offers durably constructed equipment to support your industrial processing needs. Protect your system and enhance your equipment with these accessories.

PUMP CARTS

Mobilize your Fluid Transfer

- Mounting patterns available for most pump configurations
- Enables flexibility for fluid transfer throughout your facility



PULSATION DAMPENERS

Extend the Life of your System

- Minimize noise, plumbing damage and product degradation
- Ensure a smooth, steady flow with reduced cavitation and foaming
- Compatible with air-operated and electric-operated double diaphragm pumps



| Pulsation Dampeners | | | |
|---------------------|--|--|------------------------------------|
| CONFIGURATIONS | Materials of Construction | Diaphragm Options | Connection Type |
| 1 in. | Aluminum, Polypropylene | Buna-N, PTFE/EPDM Overmold, PTFE/Santoprene 2-piece, Santoprene | Metal - NPT/BSPT; Plastic - Flange |
| 1.5 in. | Aluminum, Polypropylene | Buna-N, PTFE/EPDM Overmold, PTFE/Santoprene 2-piece, Santoprene | Metal - NPT/BSPT; Plastic - Flange |
| 2 in. | Aluminum, Polypropylene, Stainless Steel | Buna-N, FKM (Viton), PTFE/EPDM Overmold, PTFE/Santoprene 2-piece, Santoprene | Metal - NPT/BSPT; Plastic - Flange |

CHEMSAFE™ CHEMICAL PUMPS IDEAL FOR THE MOST CHALLENGING FLUIDS

100% PTFE corrosion-resistant fluid paths, ChemSafe pumps are configured to meet most, temperature and chemical compatibility requirements.

LEAK-FREE TECHNOLOGY FOR EASE OF USE



- Dual force, tie-bolt design ensures chemical containment and reduces cold flow
- Machined fluid components

CORROSION-RESISTANT DESIGN

- 100% PTFE fluid paths
- No exposed metals

USER-FRIENDLY PARALLEL PILOT SHIFTING

- Easy to maintain
- Stall-free design
- Reduced icing air system

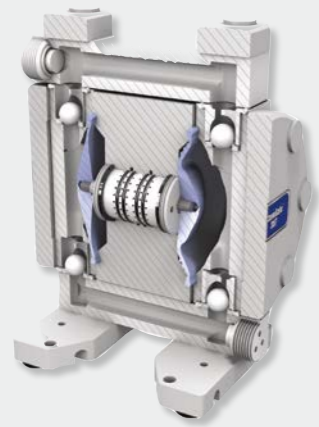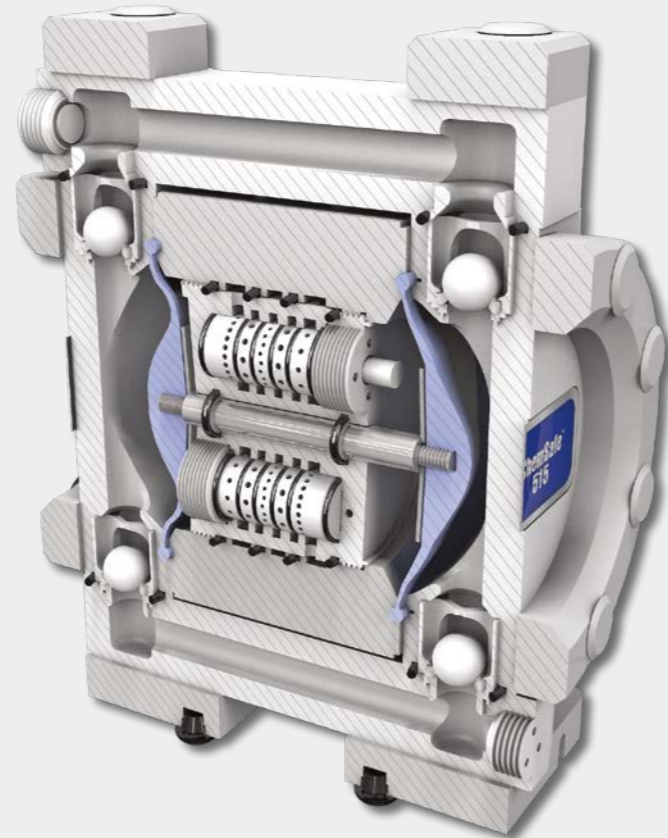

| PUMP SIZE | Max. Flow Rate | Max. Fluid Pressure | Connection Size | Max. Pumpable Solids |
|-----------|--------------------|--------------------------|-----------------|----------------------|
| 205 | 9.5 lpm (2.5 gpm) | 7 bar, 0.7 MPa (100 psi) | 1/4 in. | 1.3 mm (0.06 in.) |
| 307 | 25.4 lpm (6.7 gpm) | 7 bar, 0.7 MPa (100 psi) | 3/8 in. | 2 mm (0.08 in.) |
| 515 | 60.6 lpm (16 gpm) | 7 bar, 0.7 MPa (100 psi) | 1/2 in. | 4 mm (0.16 in.) |
| 1040 | 146 lpm (39 gpm) | 7 bar, 0.7 MPa (100 psi) | 1 in. | 6 mm (0.24 in.) |
| 1590 | 376 lpm (99.5 gpm) | 7 bar, 0.7 MPa (100 psi) | 1.5 in. | 8 mm (0.32 in.) |

SOLOTECH™ PERISTALTIC HOSE PUMPS MAXIMUM MATERIAL PRODUCTIVITY

With only the hose in contact with the fluid being pump and no check valves in line, Graco's SoloTech peristaltic pumps are ideal for metering and transferring materials that other pumps cannot handle.



EFFICIENT PUMPING ACTION

- One hose compression per revolution extends hose life

LOWEST MAINTENANCE

- No valves, seals or glands

PUMPS WIDEST RANGE OF MATERIAL

- Patented design ensures only the hose comes in contact with fluid
- Easily pumps abrasive, corrosive, shear sensitive, and gas entrapped fluids

REVERSIBLE

- Pumps can be used to empty lines or clear blockages

EXTENDED HOSE LIFE


- Only one hose compression per revolution

SINGLE ROLLER DESIGN

- Compresses through a full 360° rotation, reducing temperature and friction
- Delivers longest hose life

| HOSE MATERIALS | STRIPE COLOR / INSIDE COLOR | MAX FLUID TEMPERATURE | APPLICATION AREA |
|-------------------------------------|-----------------------------|-----------------------|----------------------------|
| Natural Rubber | None / Black | 71 °C (160° F) | Abrasives |
| Chlorosulfonated Polyethylene (CSM) | Orange / Black | 121 °C (250° F) | Highly Corrosive Chemicals |
| Nitrile | Yellow / Black | 121 °C (250° F) | Oils or Oily Products |
| Ethylene Propylene (EPDM) | Blue / Black | 104 °C (220° F) | Corrosive Chemical |

Choose from 4 different hose materials to meet your specific application requirements

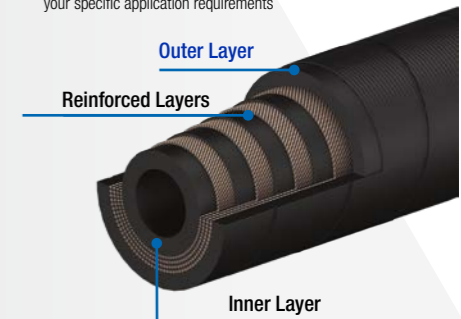

| PUMP SIZE | Flow Rate Range | Max. Fluid Pressure | Connection Size – Flange OD | Hose ID |
|-----------|-------------------------------------|--------------------------|-----------------------------|------------------|
| i6 | 0.026 - 0.95 lpm (0.007 - 0.25 gpm) | 9 bar, 0.9 MPa (125 psi) | 90 mm (3.54 in.) | 6 mm (0.24 in.) |
| i10 | 0.049 - 2.5 lpm (0.013 - 0.67 gpm) | 9 bar, 0.9 MPa (125 psi) | 90 mm (3.54 in.) | 10 mm (0.39 in.) |
| i16 | 0.148 - 5.3 lpm (0.039 - 1.4 gpm) | 9 bar, 0.9 MPa (125 psi) | 90 mm (3.54 in.) | 16 mm (0.63 in.) |
| i23 | 0.34 - 17 lpm (0.09 - 4.5 gpm) | 9 bar, 0.9 MPa (125 psi) | 108 mm (4.25 in.) | 23 mm (0.91 in.) |
| i26 | 0.757 - 37.1 lpm (0.23 - 9.8 gpm) | 9 bar, 0.9 MPa (125 psi) | 108 mm (4.25 in.) | 26 mm (1.02 in.) |
| i32 | 1.4 - 67 lpm (0.373 - 17.7 gpm) | 9 bar, 0.9 MPa (125 psi) | 125 mm (4.92 in.) | 32 mm (1.26 in.) |

FAST-FLO® PISTON TRANSFER PUMPS DURABLE, LONG LASTING PISTON PUMP

Fast-Flo air-operated piston pumps deliver a smooth, reliable flow. Drum lengths and stubby models are available for either drum transfer or wall mount siphon feed applications. Ideal for low to medium viscosity fluids.

IMMERSED INLET

- For faster priming of heavier fluids

AIR-POWERED

- For high reliability and low cost

VISCOSITY OPTIONS

- Disk check options for lower viscosity fluids
- Piston style lower options accommodate higher viscosities

SUBMERSIBLE SUCTION TUBE

- Eliminates need for suction pipe or hose

LIGHT WEIGHT

- Allows for easy transport and drum insertion

RUGGED DESIGN

- For years of dependable service



FAST-FLO AIR MOTOR

Easily control the flow rate by regulating the air supply. Best suited for low flow applications moving low to medium viscosity fluids.

UL listed options available for use with lacquers, paints, varnishes, thinners, etc.



| PUMP RATIO | Maximum Working Pressure | Fluid Inlet Size | Fluid Outlet Size |
|------------|--------------------------|------------------|-------------------|
| 1:1 | 7 bar, 0.7 MPa (100 psi) | 1.5 in. | 3/4 in. |

HYDRA-CLEAN® PRESSURE WASHERS ON-DEMAND HIGH PRESSURE SOLUTIONS

Ideal for use in a variety of in-plant cleaning applications and can be used with hot or cold water, detergents or strong chemical solutions up to 93°C (200°F). Available in wall-mount and cart-mount options.

HIGH-RATIO PRESSURE WASHER

Unmatched Cleaning Power

- Up to 310 bar (4500 psi)
- Tackle the toughest cleaning challenges

CLEAN HAZARDOUS MATERIALS

- Clean oil and chemical spills
- Remove materials without exposing workers to dangerous situations

KEEP YOUR EQUIPMENT CLEAN

Use in a Variety of Industries

- Remove grease, oil or other contaminants
- Help extend your equipment's lifespan



| PUMP RATIO | Maximum Fluid Flow Rate | Maximum Working Pressure | Maximum Inlet Air Pressure |
|------------|-------------------------|---------------------------------|----------------------------|
| 6:1 | 16 lpm (4.2 gpm) | 42.7 bar, 4.2 MPa (620 psi) | 7 bar, 0.7 MPa (100 psi) |
| 12:1 | 15.71 lpm (4.15 gpm) | 86.2 bars, 8.6 MPa (1250 psi) | 7 bar, 0.7 MPa (100 psi) |
| 23:1 | 18.62 lpm (4.92 gpm) | 156.9 bars, 15.7 MPa (2275 psi) | 7 bar, 0.7 MPa (100 psi) |
| 30:1 | 19.04 lpm (5.03 gpm) | 211.3 bars, 21.1 MPa (3065 psi) | 7 bar, 0.7 MPa (100 psi) |
| 40:1 | 17.83 lpm (4.71 gpm) | 275.8 bar, 27.6 MPa (4000 psi) | 7 bar, 0.7 MPa (100 psi) |
| 45:1 | 3 lpm (0.8 gpm) | 310 bar, 31 MPa (4500 psi) | 7 bar, 0.7 MPa (100 psi) |

PRÉSENTATION DES APPLICATIONS

CHEMICAL

Detergent cleaning, polymer, fertilizer, chemical blending, semiconductor, oil & gas (condensate and oil recycling)

- Husky
- QUANTM
- SoloTech
- ChemSafe
- Hydra-Clean



BUILDING MATERIALS

Wood preservation, engineered wood products, roll coating (paint and adhesive)

- Husky
- QUANTM
- Fast-Flo



PULP & PAPER

Paper manufacturing and corrugated cardboard production

- Husky
- QUANTM



WATER TREATMENT

Chemical dosing, polymer, lime slurry

- SoloTech
- Husky
- QUANTM
- Hydra-Clean



DEWATERING

Sludge, sump evacuation and waste fluids

- Husky
- QUANTM



PAINT

Paint delivery systems, solvent transfer, moisture sensitive material handling and paint circulation

- Husky
- QUANTM
- Fast-Flo
- Hydra-Clean





OUR BRAND PROMISE TO YOU

Since 1926, **innovation**, **quality** and **A+ Service** have been at the centre of Graco.

Experience Innovation

Our focus on innovation results in products and equipment that lead the industry with technologically-advanced features, pioneering design, high performance and unparalleled reliability. In short, innovation is how you get better products!

Building Quality

You're investing in high-quality products built to last for years of reliable service. Moreover, we partner with our customers to better understand how you're deploying our products in the field, then use your experiences to improve performance and durability.



A+ service, every time

You'll see A+ Service in action when you contact any of our support services options no matter where you are in the world. We'll listen to your situation and work methodically to resolve it as quickly as we can. We are guided by a mindset of integrity and a customer service view centred on collaboration and relationships, not transactions.



We're here to answer questions and help address your needs:

www.graco.com/contact

Graco is certified ISO 9001.

©2024 Graco Distribution BV 300570ENEU-M 10/24. Printed in Europe.

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners. For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.